


CONDENSED SPEC SHEET*

Grade Name: Eco Blanca Premium (CBWP)

Eco Blanca Premium is a whiteback board made from recycled fibre. It is coated on both sides and has a very low dirt count, leading to superior surface smoothness and excellent print reproduction. Eco Blanca Premium comes with high stiffness and caliper consistency resulting in strong and sturdy cartons.

SUBSTANCE (GSM) (Avg)	CALIPER (μM) (Avg.)	BENDING RESISTANCE (L&W) mN		
QC/SOP/96	QC/SOP/97	QC/SOP/105 Tappi T 556		
Tappi T 410	Tappi T 411	MD	CD	GM
210	252	89	43	62
220	264	102	50	72
230	276	119	60	84
250	303	156	78	110
260	318	179	89	126
270	332	205	102	145
280	346	233	116	165
300	376	258	129	183
320	403	299	149	211
350	452	400	200	283
360	468	441	221	312
380	498	522	261	369
390	511	566	283	400
420	550	689	345	488
TOL : ± 4%	± 5%			- 15%

PARAMETER	UNITS	VALUE
PLY BOND (Avg) QC/SOP/101, Tappi T569	J/m ²	150 MIN
ROUGHNESS PPS (Avg) TOP GSM ≤ 300 GSM > 300 QC/SOP/102, Tappi T 555	μm	1.7 MAX 2.0 MAX
BRIGHTNESS ISO (with UV-100%) TOP BOT QC/SOP/110, ISO 2470	%	77 MIN 72 MIN
SURFACE STRENGTH IGT PICK (MED.VISCOSITY) TOP QC/SOP/104, ISO 3782 & 3783	m/s	0.70 MIN
GLOSS AT 75° (Avg.) TOP QC/SOP/103, Tappi T 480	%	40 MIN
MOISTURE GSM ≤ 300 GSM > 300 QC/SOP/99, Tappi T 412	%	7.0 ± 1.0 8.0 ± 1.0
COBB (60 sec) TOP BOT QC/SOP/100, Tappi T 441	g/m ²	50 Max 100 Max

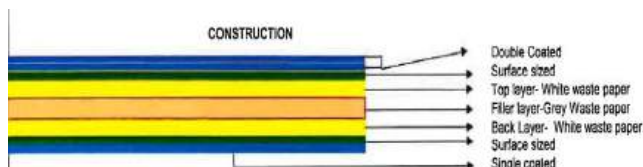

CERTIFICATIONS & COMPLIANCES	
Manufacturing	ISO 9001
EHS	FSC®, CII GreenCo Platinum+, ISO 14001, ISO 45001, AWS Platinum

Note :

1. All Properties are according to ITC Limited, PSPD Unit : Kovai Measurements
2. Test Climate 23°C ± 1 & 50% ± 2RH
3. Tolerances are based upon 95% Confidence limits of single mill measurements of conditioned random samples
4. Can be supplied with FSC® certification on request (FSC®-C064218)



FMCG



CONSUMER
ELECTRONICS



GARMENTS